


UV TRANSILLUMINATOR STANDARD, WAVE LENGTH 365+312 NM

REF: DH.WUV02050

DAIHAN® Digital Precise Circulation Immersion Pump Head "WCB-H", 11 & 22 Lit, up to 100°C
With Digital Fuzzy Control System, Certi. & Traceability, Power Circulation Pump, 5 Lit/min

UV Filter

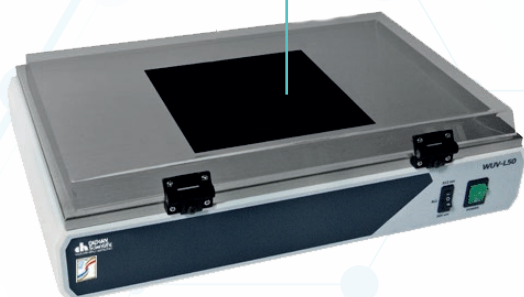

(1) Transilluminator, Standard
Case "WUV-L" Model

- CE Certified
- **PL(Product Liability) Insurance**
- **With Certificate & Traceability : Controlled by Serial Number, Certificate, Delivery information, and Traceable Data Base System**
- Low Cost, Robust, Versatile, Affordable & Gentle Excitation
- Hinged UV-Blocking Safety Cover Protects User from UV Radiation
- Stainless-steel Frame and Robust Steel Housing
- Ideal for Standard Gel Documentation and Preparative Work, especially for Detection of very small amount of DNA & RNA Stained by EtBr
- Long-Life Electronic (Low Heat, no Flickering)
- High (100%) / Low (75%) Intensity Switch

Technical specifications

Parameters	Description
Body Size-type	(1) Standard Case-type
Dimension	495×330×h95 mm
Filter Size	200×200 mm
Wave Length	Dual 365+312 nm
UV Lamps	15W×6ea (90W)
Power Consumption	95 W
Weight	10 kg
Packing Size (mm) & Gross Weight (kg)	520×380×h220 mm, 12 kg
Electric requirements	1 Phase, AC 120V, 60Hz

 (601) 300 3161 +(57) 316 532 6905

 www.quimicompany.com.co

 info@quimicompany.com.co